NX3000 Firmware Upgrade guide (i-Launcher)



Samsung Electronics.

NX3000 Firmware upgrade guide

- Easy Firmware upgrade: Please use i-Launcher program.
- You can install i-Launcher using NX camera.

(refer to next page)

*** Information**

- 1) Use the full charged battery
- 2) Suggested memory card format before upgrade start
- 3) During the updating process: Do not cut off the power / Do not remove the battery
 - → It causes the cannot power-on or the severe damage
- 4) Finish upgrade: all menu will be reset

Installing i-Launcher using camera

- 1. Turn off the camera.
- 2. Connect the camera to your computer with the USB cable.





- Before installing the program, ensure that the PC is connected to a network.
- You must plug the small end of the USB cable into your camera. If the cable is reversed, it may damage your files. The manufacturer is not responsible for any loss of data.
- 3. Turn on the camera.
- 4. When the pop-up window prompts you to install i-Launcher, select Yes.
 - If a pop-up window prompting you to run iLinker.exe appears, run it first.
 - When you connect the camera to a computer with i-Launcher installed, the program will launch automatically.
- 5. Follow the on-screen instructions to complete the installation.
 - An i-Launcher shortcut will appear on the computer.


[Opening i-Launcher]

- Windows OS : Start → All Programs → Samsung → i-Launcher
- Mac OS : Applications → Samsung → i-Launcher


Firmware upgrade method

- 1. You can connect the camera to your computer
- 2. Opening "Samsung i-Launcher"
 - → select "Firmware Upgrade" menu
 - * Automatically "Upgrade window" open if new firmware registered.




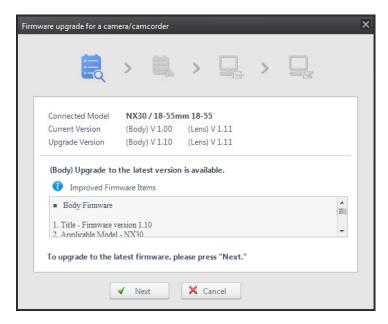


3. You can check precautions

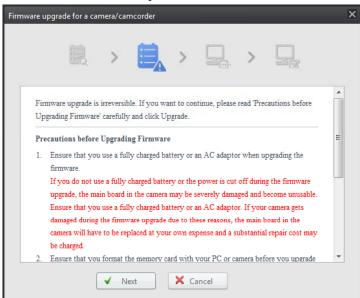

4. Firmware download start

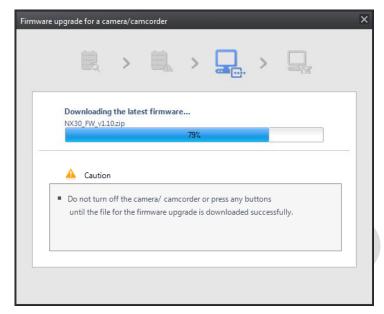

5. Once the transfer is complete, click the Close button

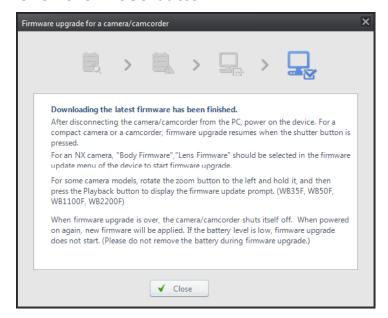

6. Terminate the USB cable connection

7. Turn the camera on

8. Select the MENU \rightarrow Setting

→ Device Information



9. Select Software Update


→ Body Firmware Update



10. Update will start follow below sequence




Firmware version checking
 Press "Yes" → Upgrade start




2 checking firmware file




3 Device will restart after checking firmware



- ④ after restart → updating start
- Do not cut off the power
 Do not remove the battery



- 5 You can see the updating status
- →After finish updating(2/2)
- → Camera power-off & reboot
- * upgrade is not finished



- 6 Finish upgrade
- → You can see "Firmware update completed" message
- If your camera stop or power-off during upgrading
- → Please retry upgrade